


Carbide Cutters - Orange Band

For use on Stainless Steel, Tough Metal, Anodised Aluminium etc.

1 of 2

Taper Shank


Standard Engraving Cutter



Rigid Blade Slotting Cutter




Heavy Duty Engraving Cutter



Description	Tip Dia.	Shank	Carbide Tipped	Single ended	Slotting Cutter	Code	Price (£)
Standard Engraving Cutter	0.140"	Taper	●	●	●	OT 140	12.30
Standard Engraving Cutter	0.140"	Taper	●	●	●	OT 140	15.30
Heavy Duty Engraving Cutter	0.187"	Taper	●	●	●	OT 187	15.30
Heavy Duty Engraving Cutter	0.250"	Taper	●	●	●	OT 250	16.00

Straight Shank

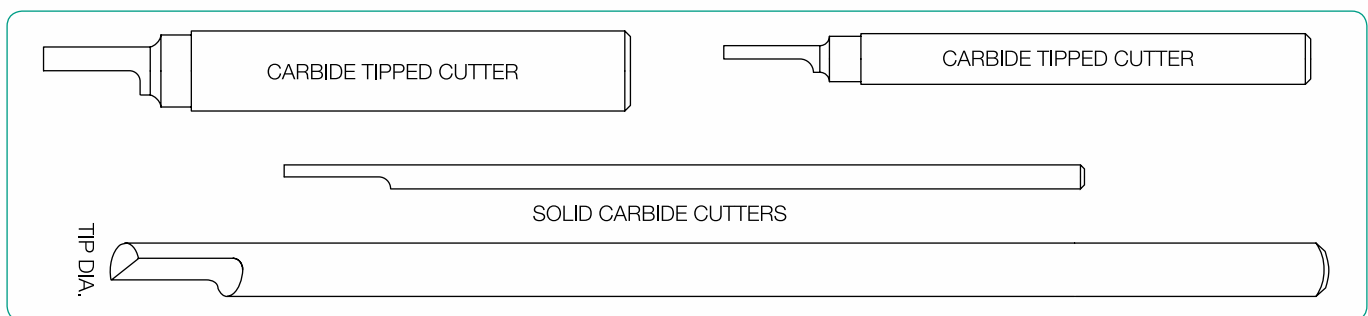

Tip Dia.	Shank Dia.	Length	Carbide Tipped	Solid Carbide	Single ended	Double Ended	Slotting Cutter	Code	Price (£)
0.125"	1/8"	1"		●	●			OS 125	8.20
0.125"	1/8"	2"		●	●			OJ 125	11.35
0.125"	1/8"	2"		●		●		OJ 125 DE	12.65
0.125"	1/8"	4"		●	●			OG 125	12.45
0.125"	1/8"	4 1/2"		●	●			OW 125	13.75
0.125"	1/8"	4 1/2"		●	●		●	OWS125	17.90
0.125"	1/8"	5"		●	●			OW125L	15.05
0.140"	11/64"	6 1/2"	●		●			OG 1164	13.20
0.140"	11/64"	200mm	●		●			OG1164200	16.90
0.140"	11/64"	6 1/2"	●		●		●	OGS1164	17.15
0.172"	11/64"	6 1/2"		●	●		●	OGS1164S	24.80
0.172"	11/64"	6 1/2"		●	●			OG 1164S	21.55
0.250"	1/4"	28mm		●	●			OM250SE	16.15
0.140"	1/4"	2"	●		●			OJ 140	9.25
0.140"	1/4"	2"	●		●		●	OJS 140	12.30
0.187"	1/4"	2"	●		●			OJ187	12.60
0.250"	1/4"	2"		●	●			OJ 250 SE	15.00
0.250"	1/4"	2"		●		●		OJ 250 DE	17.15
0.140"	1/4"	3"	●		●			OS 140	9.80
0.140"	1/4"	3"	●		●		●	OSS 140	13.55
0.187"	1/4"	3"	●		●			OS 187	12.85
0.250"	1/4"	3"		●	●		(30mm Blade)	OS250SE30B	25.00
0.250"	1/4"	3"		●	●			OS250SE65	18.50
0.250"	1/4"	3"		●	●			OS 250 SE	18.50
0.250"	1/4"	3"		●		●		OS 250 DE	20.50
0.140"	1/4"	5"	●		●			OC 140	12.30
0.140"	1/4"	5"	●				●	OCS140	15.90

Carbide Cutters - Orange Band

For use on Stainless Steel, Tough Metal, Anodised Aluminium etc.

2 of 2

Straight Shank - Continued

Tip Dia.	Shank Dia.	Length	Carbide Tipped	Solid Carbide	Single ended	Double Ended	Slotting Cutter	Code	Price (£)
0.187"	1/4"	5"	●		●			OC 187	14.70
0.250"	1/4"	5"		●	●			OC 250	23.50
0.140"	1/4"	6 1/2"	●		●			OG 140	13.20
0.140"	1/4"	6 1/2"	●		●		●	OGS 140	16.65
0.188"	1/4"	6 1/2"	●		●			OG 187	16.00
0.250"	1/4"	6 1/2"		●	●			OG 250	26.10
0.250"	3/8"	3"	●		●			OS 250 38	14.70
0.140"	3/8"	5"	●		●			OS 140 38L	14.10
0.250"	3/8"	5"	●		●			OS 250 38L	16.00
0.375"	3/8"	2 1/4"		●	●			OS 375	30.00
3mm	3mm	30mm		●	●			OK 3M	8.20
3mm	3mm	35mm		●	●			OS3M35DE	15.00
3mm	3mm	50mm		●	●			OJ3MSE	11.40
3mm	3mm	50mm		●		●		OJ3MDE	12.65
4mm	4mm	30mm		●	●			OS4M30	12.65
4mm	4mm	35mm				●		OS4M35DE	17.35
4mm	4mm	45mm		●	●			OV4M45	16.15
3.5mm	4mm	62mm	●		●			OP 140 4M	12.30
3.5mm	4mm	120mm	●		●			OH 140 4M	12.60
3.5mm	6mm	165mm	●	●	●		●	OHS1406M	16.65
4mm	4mm	60mm		●	●			OH4M60	17.90
4mm	4mm	60mm		●		●		OH4M60DE	21.95
4mm	4mm	120mm		●	●			OH 4M	18.75
6mm	6mm			●	●			OM6M	16.15
6mm	6mm	45mm		●	●			OK 6M	15.05
3.5mm	6mm	50mm	●		●			OJ 140 6M	9.25
3.5mm	6mm	50mm	●		●		●	OJS1406M	12.30
6mm	6mm	50mm		●	●			OJ6MSE	15.05
6mm	6mm	50mm		●		●		OJ6MDE	17.15
3.5mm	6mm	65mm	●					OS1406M-65	9.05
3.5mm	6mm	75mm	●		●			OS 140 6M	9.80
3.5mm	6mm	75mm	●		●		●	OSS 140 6M	13.55
4.7mm	6mm	75mm	●		●			OS 187 6M	12.85
6mm	6mm	75mm		●	●			OS 6M SE	18.55
6mm	6mm	75mm		●		●		OS 6M DE	20.50
3.5mm	6mm	165mm	●		●			OH 140 6M	13.20
4.7mm	6mm	165mm	●		●			OH 187 6M	16.00
6mm	6mm	165mm		●	●			OH 6M	26.10
6.3mm	10mm	75mm	●		●			OS 250 10M	14.70
10mm	10mm	60mm		●	●			OS 10M	30.00

Cutter Grinding

Description	Code	Price (£)
Ground Parallel	CG-PA	2.00
Any Angle	CG-AN	2.00
Back to Axis	CG-CBA	4.15
Ball Ended	CG-BE	4.35
1/4 Ground	CG-QG	4.15